

Features

- According to USB 2.0 / USB 3.0 specification
- Simple and cost effective termination by plug in patch cable
- Cable tie strain relief

Technical characteristics

Contacts	4, 8
Electrical data acc. to IEC 61984	1 A 50 V 0.8 kV 3
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage acc. to UL	30 V
Insulation resistance	≥10 ¹⁰ Ohm
Limiting temperatures	-40 °C ... 85 °C
Flammability (insert) acc. to UL 94	V 0
Mating cycles	≥500
Material (insert)	polycarbonate
Colour (insert)	RAL 7032 (light grey)

Specifications and approvals


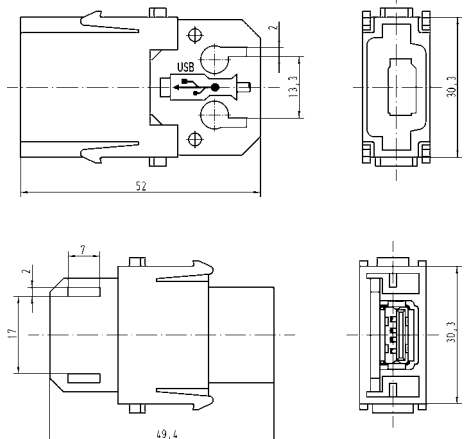
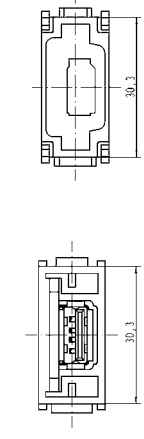

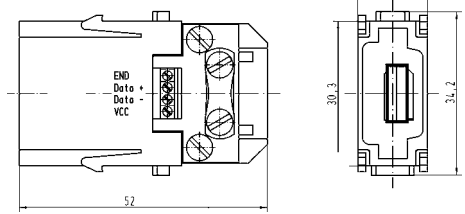


IEC 60664-1
IEC 61984



Number of contacts

4,8

50 V
1 A

Identification	Part number		Drawing	
	male	female	Dimensions in mm	
Han-Modular®, Han® USB module, Module for patch cable, USB 2.0 	09 14 001 4601	09 14 001 4701		
Han-Modular®, Han® USB module, Module for screw termination, USB 2.0 	09 14 001 4651			
Han-Modular®, Han® USB module, Module for patch cable, USB 3.0 		09 14 001 4703		

Han-Modular