

## Features

- Suitable for HARTING LC contacts
- For GI-Fibre 50 - 62.5 / 125 µm and for single mode fibre

## Technical characteristics


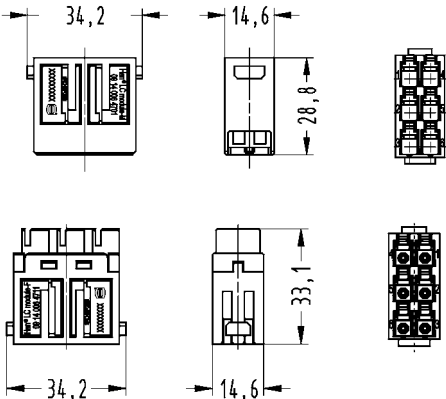



Contacts	6
Limiting temperatures	-40 °C ... 85 °C
Flammability (insert) acc. to UL 94	V 0
Mating cycles	≥500
Material (insert)	polycarbonate
Colour (insert)	RAL 7032 (light grey)

## Details

**ATTENTION!** Guide pins and bushes are prescribed (see chapter 80).

Number of contacts

# 6

Identification	Part number		Drawing Dimensions in mm
	male	female	
Han-Modular®, Han® LC module, for F.O.    Please order contacts separately.	09 14 006 4701	09 14 006 4711	
LC contact, for wire gauge up to 3mm max., LWL Multi Mode  	20 10 125 8211	20 10 125 8211	
LC contact, for wire gauge up to 2mm, LWL Multi Mode  	20 10 125 8212	20 10 125 8212	
LC contact, for wire gauge up to 3mm max., LWL Single Mode	20 10 125 8220	20 10 125 8220	
LC contact, for wire gauge up to 2mm, LWL Single Mode	20 10 125 8221	20 10 125 8221	

Han-Modular